

Q6 edge[®]_{HD}



With features like standard 4-pole motors, Mid-Wheel 6 Drive Design and ATX Suspension, the **Q6 Edge HD** is engineered to meet the performance needs of the most active user. The Q6 Edge HD accepts a complete range of seating and electronics options to deliver exceptional rehab capability at an excellent value, and is available with our iLevel technology.



QUANTUM[®]

#1 FOR REHAB POWER



| quantumrehab.eu

Specifications

DRIVE WHEELS	14" flat free or pneumatic, also available as extra wide high profile tires
CASTER WHEELS	6" flat free
MAXIMUM SPEED ¹	Up to 7,6 km/h
GROUND CLEARANCE	76 mm
TURNING RADIUS ²	502 mm
LENGTH ²	904 mm
WIDTH	667 mm
SEATING SIZES	
TRU-BALANCE 3 ¹²	Width: 406 - 711 mm Depth: 406 - 711 mm
SEAT TO FLOOR HEIGHT ^{9,10,11}	420 mm (Low) 445 mm (Middle) 470 mm (High)
MANUAL RECLINE	No
BATTERY REQUIREMENTS ^{3,4}	Two 12 volt, deep-cycle 62 or 75 Ah
BATTERY WEIGHT ⁷	62 Ah: 18,7 kg 75 Ah: 24,4 kg
BATTERY CHARGER	8 Amp, off-board
AVAILABLE ELECTRONICS ⁶	Q-Logic 3
DRIVETRAIN	4-pole
WEIGHT CAPACITY ^{5,8}	204 kg
BASE WEIGHT	65 kg

- Speed varies with user weight, terrain type, battery charge, battery condition and tire pressure
- Without front riggings
- AGM or Gel-Cell type required. See VI. "Batteries and Charging."
- Battery capacity may change when adding power positioning systems
- Weight capacity is dictated by the selection of seating
- All Quantum Rehab units can be ordered with specialty controls
- Battery weight may vary +/- 1,3 kg based on manufacturer
- Weight capacity is reduced to 181 kg with the iLevel power adjustable seat height
- Seat-to-floor heights are measured with the unit unloaded
- Tilt or lift adds 35 mm
- Measurements without seat cushion
- Seating bigger than 635 mm is not compatible with iLevel

NOTE: All specifications subject to change without notice.


The information contained herein is correct at the time of publication; we reserve the right to alter specifications without prior notice. Speed and range vary with user weight, terrain type, battery charge, battery condition and tire pressure. Due to manufacturing tolerances and continual product improvement, length, width, turning radius and ground clearance can be subject to variance of + or - 3 %. Dimensions listed are for power base only. Overall measurements will vary based on seating and accessory selections.

Theoretical range is calculated under test conditions in accordance with European standards. Actual range in normal use will depend on many factors, including the condition of the vehicle and its batteries, the weight of the driver, correct tire pressures, ambient temperature, and the gradient and surface of the road or pavement.

Features

- Mid-Wheel 6 allows six wheels on the ground for maximum stability
- Low impact OMNI-Casters (nylon, spherical-shaped casters) on front and rear prevent wheel hang-ups
- ATX Suspension (Active-Trac with extra stability) incorporates front OMNI-Casters and semi-independent rear caster beam for enhanced performance over more varied terrain
- Power lift option enables up to 254 mm of seat elevation while at walking speed (up to 5,2 km/h)
- LED lighting package

Colours

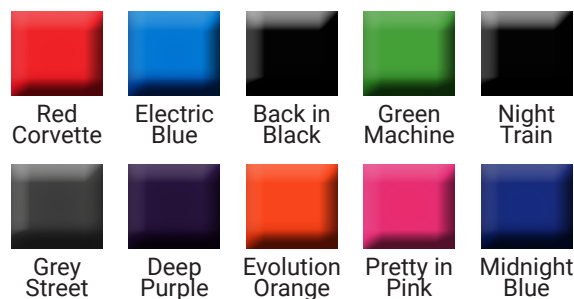

Pride Mobility Products BV
De Zwaan 3
1601 MS Enkhuizen
The Netherlands

Tel: +31 (0)85-0408630 · Fax: +31 (0)85-0430039
quantumrehab.eu · info@prideeurope.nl



EU_SSQ0004/REVC/01APR22